

Powering Performance...
Company-wide



Document Solutions





Meeting the Demands of High-volume Business Environments

Intuitive handling combines with exceptional performance to make the TASKalfa 6500i the ideal document imaging solution for your high-volume business environment. Designed for strength and reliability, the TASKalfa 6500i impressively exceeds your everyday document imaging demands at a fast 65 ppm, while cost-effective finishing options add a professional touch to your more complex document output. Color scanning and optional fax bring added functionality to this black & white workhorse, while integrated business applications facilitate document workflow and simplify your business processes.



Kyocera's award-winning ultra-reliability and unique long-life technology ensure superior performance, proven productivity and maximum efficiency. When it comes to document imaging innovation and quality you can rely on, the TASKalfa 6500i delivers.

Feature-Rich Design Brings Innovation to Your Enterprise

The TASKalfa 6500i is strong on features and configurations, offering the flexibility to scale your MFP to the specific needs of your enterprise. It's all about feature-rich design with a focus on value and exceptional color functionality.

- An adjustable 10.2" Color Touch-screen Control Panel is mounted on a movable arm for maximum viewing comfort. Intuitive prompts, on-board help guidance and accessibility display make programming from the device quick and effortless.
- Robust connectivity features including standard Gigabit Ethernet, offer seamless integration within virtually any network environment or platform.
- A standard 270 sheet Dual Scan Document Processor enables super fast scan speeds in full color and black & white at up to 160 images per minute.
- A standard USB Host Interface provides convenient print-from or scan-to capabilities for today's 'on the go' workforce in XPS, PDF, JPEG and TIFF.
- The optional 4,000-sheet finisher provides the professional touch your output deserves. Add the 7 bin mailbox and booklet/trifold unit and you can efficiently handle large production runs in-house, optimizing time and minimizing costs.
- The long life technology and 'class leading' drum yields deliver extended preventive maintenance intervals and maximize device "uptime".
 This adds up to ultra-reliable operation and a low total cost of ownership.
- Kyocera Command Center RX, the MFP's embedded web home page, gives you the remote access you need to check device status, establish system settings, or access stored Document Box files from your desktop.
- An impressive toner yield of 70,000 pages allows you to run high quality, long print jobs in crisp black & white, maximizing productivity and minimizing interruption.

Only From Kyocera

KYOCERA Document Solutions is a global leader in the digital imaging industry, with an award-winning line of TASKalfa multifunctional systems and ECOSYS laser printers, products that consistently set the standard for high performance, superior image quality, ease-of-use and durability. Along with a full complement of advanced business applications and networking solutions, Kyocera's robust product line supports your need for maximum productivity at minimal total cost.

Kyocera continually strives to raise the bar for excellence in both products and service for exceptional results you and your business can count on.

Keeping the Future Green

Kyocera is committed to pursuing a harmonious balance between economic development and environmental preservation. We adhere to the goals of our worldwide Environmental Action Plan in developing office solutions with environmentally friendly and superior energy- and supply-saving features, without compromising your productivity.



The Power to Take Control of Everyday Tasks and Keep Information Moving

Information is your most important business asset, and you need a 'no holds barred' document imaging system to keep it flowing seamlessly. The TASKalfa 6500i raises the bar on core functionality with unparalleled efficiency:

- Crisp print and copy output capabilities power your communications via robust paper handling up to 12" x 18" and 110 lb cover, plus a remarkable 7,650 sheet maximum paper capacity for long print runs and minimal interruptions.
- Secure Document Box lets you keep frequently used documents close at hand for hassle free printing, secure file sharing and pin-based Private Print.
- Pre-program and store commonly used copy, scan and print settings at the control panel and the KX Driver to simplify your daily tasks.
- Optional Super G3, LAN Fax and Dual Fax capability adds versatility while leveraging your investment in an MFP.

A Master at Multitasking

Your business is non-stop, and requires an MFP that can stay up to speed. The TASKalfa 6500i has the power you need to perform simultaneous document processing tasks. Its lightning fast 800MHz processing speed plus standard 2GB of RAM and Dual 160 GB of Hard Disk Drive space support exceptional all-in-one productivity. Now you can produce a large print run, scan documents for electronic storage, have dual fax lines and utilize advanced finishing

capabilities all in one high speed black & white MFP. The TASKalfa 6500i's maximum uptime will keep your processes going quickly and seamlessly so you never miss a beat.





Enhanced MFP Performance... Powered by HyPAS®

Enhance your TASKalfa 6500i's capability with unique and scalable business applications, powered by HyPAS –Kyocera's powerful software development platform. These applications, developed by Kyocera or by our third-party solution partners, allow your business to further optimize your TASKalfa MFPs' "out-of-the-box" performance. Kyocera applications transform your MFP into a powerful resource that suits your existing document imaging and workflow needs today, as well as delivers the flexibility you need for tomorrow.

Kyocera's expanding suite of business applications include:

- KYOCERA Mobile Print Simply and conveniently print files, web pages, and images using your smartphone or tablet.
- OpenText RightFax Connector Scan and send documents to the RightFax server directly from TASKalfa MFPs for full fax server integration.
- SharePoint Connector Microsoft SharePoint users can scan documents into their SharePoint folder and libraries to search/ print directly from the TASKalfa MFP control panel.
- Card Authentication Authenticate, Authorize and Track individual MFP usage with the simple swipe of an HID-card.
- DMS Link Connect your TASKalfa MFP to most popular document management systems for document capture and routing.

Visit www.kyoceradocumentsolutions.com to learn more about additional business applications designed to fit your essential needs.

Which Configuration is Right for You?

Truly designed with you in mind, the TASKalfa 6500i brings configuration flexibility to the workplace, allowing you to customize the MFP to your specific paper handling needs.

Paper Handling Flexibility




Total Paper Capacity =4.150 sheets = 7,150 sheets = 5.650 sheets



Optional 4,000 Sheet Finisher

☐ 2/3 Hole Punch ☐ 7-Bin Mailbox

Additional Options... ■ Booklet and Tri-Fold Copy Tray

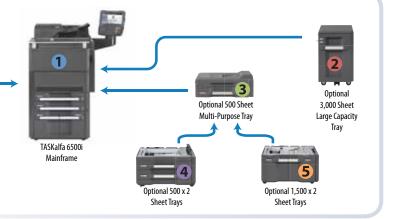





Shown with standard 270 sheet DSDP



Shown with standard 270 sheet DSDP, optional 500 x 2 sheet paper trays, 500 sheet multi-purpose tray, and 4,000 sheet finisher



Shown with standard 270 sheet DSDP, optional 3,000 sheet side LCT and 4,000 sheet finisher



Newly designed, easy-to-use large color touch screen control panel



Hybrid Platform for Advanced Solutions

| Letter: 65 ppm; Legal: 39 ppm; Ledger: 32 ppm; 12" x 18": 32 ppm (print only) 20 Seconds or Less (Power On) 20 Seconds or Less (Power On) 20 Seconds or less; Print: 5.8 Seconds or Less 300 x 600 dpi; 9600 x 600 dpi interpolated / 8 bit depth 2 GB RAM Standard / Dual 160 GB HDD 3 Dandard Stackless Duplex Supports Statement to 12" x 18", 16 lb Bond – 140 lb Index (60 – 256gsm) 3 Injut Side Exit: Statement - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 2 CB RAM Standard - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 2 CB RAM Standard - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 2 CB RAM Standard - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 2 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 4 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 4 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 4 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 4 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 4 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 4 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 5 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 6 CB RAM Standard - 140 Ib Index (Bd - x 41.45"; with Con |
|--|
| Copy: 5.2 Seconds or less; Print: 5.8 Seconds or Less 300 x 600 dpi; 9600 x 600 dpi interpolated / 8 bit depth 2 c BB RAM Standard / Dual 160 GB HDD 3 Dandard Stackless Duplex Supports Statement to 12" x 18", 16 lb Bond – 140 lb Index (60 – 256gsm) 3 Right Side Exit: Statement - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 1 20V, 60Hz, 12.0A 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 375.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 3 Tootprint: 26.96" x 28.46" x 4 |
| 2. GB RAM Standard / Dual 160 GB HDD Standard Stackless Duplex Supports Statement to 12" x 18", 16 lb Bond – 140 lb Index (60 – 256gsm) Standard Stackless Duplex Supports Statement to 12" x 18", 16 lb Bond – 140 lb Index (60 – 256gsm) Stight Side Exit: Statement - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 120V, 60Hz, 12.0A Footprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 350,000 Pages Per Month Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730 , PF-780 , F -550 Sheets Trays 1, 2, PF-730 , PF-780 , F -550 Sheets Trays 1, 2, PF-730 , PF-780 , S .5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740 , PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Sond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JGG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 39 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Post Interface, 2 Expansion Slots |
| Page 16 B RAM Standard / Dual 160 GB HDD Standard Stackless Duplex Supports Statement to 12" x 18", 16 lb Bond – 140 lb Index (60 – 256gsm) Right Side Exit: Statement - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 120V, 60Hz, 12.0A Footprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs S50,000 Pages Per Month Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730, PF-780: 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 366 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots |
| Standard Stackless Duplex Supports Statement to 12" x 18", 16 lb Bond – 140 lb Index (60 – 256gsm) Right Side Exit: Statement - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 120V, 60Hz, 12.0A Footprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 350,000 Pages Per Month Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730 , PF-780 : 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740 , PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AlX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Diptional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Diptional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots |
| Right Side Exit: Statement - 11" x 17" / 70 sheets; 12" x 18" requires optional Copy Tray (D) or DF-790 Finishe 120V, 60Hz, 12.0A Footprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 350,000 Pages Per Month Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet; Maximum: 7,650 Sheets Trays 1, 2, PF-730 , PF-780 : 5.5" x 8.5" - 12" x 18"; Trays 3, 4, PF-740 , PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" - 12" x 18" (Multiple Sheets) Trays: 16 lb Bond - 140 lb Index (60 - 256gsm); MPT: 16 lb Bond - 110 lb Cover (60 - 300gsm) BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Deptional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Deptional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Deptional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Deptional: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots |
| 120V, 60Hz, 12.0A |
| Footprint: 26.96" x 28.46" x 41.45"; with Control Panel: 42.87" x 28.46" x 52.99" / 335.1 lbs 850,000 Pages Per Month Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730, PF-780: 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Dytional: 10/100/1000BaseTX (IB-50 for Dual NIC) TCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Dual 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730, PF-780: 5.5" x 8.5" - 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" - 12" x 18" (Multiple Sheets) Trays: 16 lb Bond - 140 lb Index (60 - 256gsm); MPT: 16 lb Bond - 110 lb Cover (60 - 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Dptional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Dual 500 Sheet Trays, Dual 1,500 Sheet Trays, 150 Sheet MPT; Auto Selection/Switching Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730, PF-780: 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Irays 1, 2, PF-730, PF-780: 5.5" x 8.5" - 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" - 12" x 18" (Multiple Sheets) Irays: 16 lb Bond - 140 lb Index (60 - 256gsm); MPT: 16 lb Bond - 110 lb Cover (60 - 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Side LCTs: 500 Sheet Multi-Media Tray (PF-780) + Dual 500 Sheet Trays (PF-730) or Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Irays 1, 2, PF-730, PF-780: 5.5" x 8.5" - 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" - 12" x 18" (Multiple Sheets) Irays: 16 lb Bond - 140 lb Index (60 - 256gsm); MPT: 16 lb Bond - 110 lb Cover (60 - 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Dual 1,500 Sheet Trays 8.5" x 11" (PF-740); 3,000 Sheet Large Capacity Tray 8.5" x 11" (PF-770) Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730, PF-780: 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740, PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730 , PF-780 : 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740 , PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG–34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Standard: 4,150 Sheets; Maximum: 7,650 Sheets Trays 1, 2, PF-730 , PF-780 : 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740 , PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG–34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Trays 1, 2, PF-730 , PF-780 : 5.5" x 8.5" – 12" x 18"; Trays 3, 4, PF-740 , PF-770: 8.5" x 11"; MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG–34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) TCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| MPT: 5.5" x 8.5" – 12" x 18" (Multiple Sheets) Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG–34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Trays: 16 lb Bond – 140 lb Index (60 – 256gsm); MPT: 16 lb Bond – 110 lb Cover (60 – 300gsm) Bond Paper, Recycled Paper, Transparencies, Cardstock, Envelopes BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| BM PowerPC 750CL / 800 MHz PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 J36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| PRESCRIBE, PCL6 (5e, XL), KPDL3 (PS3), XPS JG-34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| UG-34 IBM ProPrinter, Diablo 630, LQ-850 I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| I36 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Windows XP/2003/Vista/2008/7 Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Novell NetWare 3.x/4.x/5.x/6.x Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Mac OS 10.x Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Sun OS 4.1.x; Solaris 2.x; AIX; HP-UX (LPR) Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, USB Host Interface, 2 Expansion Slots Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) ICP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| Optional: 10/100/1000BaseTX (IB-50 for Dual NIC) FCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| TCP/IP, IPX/SPX, AppleTalk, NetBEUI, IPv6, IPsec, SSL, WSD Print |
| |
| |
| (X Driver, Mini Driver, KX Driver for XPS, XPS Mini Driver, Network Fax Driver, PPD for MAC |
| PRESCRIBE, PDF Direct Print, KMnet Admin, KMnet Viewer, Kyocera Command Center RX |
| Color and Black & White Scanner |
| 200, 300, 400, 600 dpi |
| BW: TIFF, XPS, PDF, PDF/A; Color: TIFF, JPEG, XPS, PDF, PDF/A |
| High Compression PDF, Encrypted PDF |
| Simplex: 100 ipm BW, 70 ipm Color (300 dpi); Duplex: 160 ipm BW, 100 ipm Color (300 dpi) |
| 10/100/1000BaseTX, TCP/IP |
| Scan to Folder (SMB), Scan to e-Mail, Scan to FTP, Scan to USB, WSD Scan, TWAIN Scan |
| Through DP: Statement to 11" x 17"; Glass: up to 11" x 17" |
| TWAIN/WIA Driver |
| WAIIW WIA DIIVE |
| Fext, Photo, Text/Photo, Auto, Manual, Map |
| , , , , , |
| I – 999 / Auto Reset to 1 |
| Positive/Negative Reverse, Mirror Image, Rotate Copy, Border Erase, Split Copy, |
| Electronic Sort, Margin Shift, Page Number, Form Overlay, XY Zoom, Prevent Bleed Through, Stamp |
| 1,000 Department Codes, Job Programs, Job Build, Shortcut Keys, Repeat Copy |
| One Touch, Hue, Auto Exposure, Sharpness |
| Full Size, 5 Reduction, 5 Enlargement Preset Ratios, 25 – 400% in 1 step increments |
| Custom Box, Job Box, Removable Memory Box, Fax Box (with optional Fax System) |
| |
| Standard Dual Scan Document Processor / 270 Sheets |
| 5.5" x 8.5" – 11" x 17" |
| Simplex: 13 lb Bond – 120 lb Index; Duplex: 16 lb Bond – 120 lb Index |
| Fax System (V) / Internet Fax Kit (A) (requires Fax System V) |
| G3 Fax / MMR, MR, MH, JBIG |
| Approximately 3 seconds per page / 33.6 Kbps |
| Standard: 12 MB; Maximum: 120 MB |
| KM Network Fax Driver |
| Duplex TX/RX, Confidential RX/TX, F-Code RX/TX, Broadcasting, Fax Box, Dual Fax |
| DF-790 |
| Main Tray: 4,000 Sheets; Sub Tray (B): 200 Sheets; Sub Tray (C): 100 Sheets / 65 sheets (up to 24 lb Bond (90gsm)) |
| 5.5" x 8.5" – 12" x 18" |
| 16 lb Bond – 110 lb Cover (60 – 300gsm) |
| <u> </u> |
| 3 Positions: Top Left, Bottom Left, Center Bind |
| MT-730 Includes 7 Trays; Supports 16 lb Bond – 90 lb Index (60 – 163gsm) |
| Stack Capacity per bin: 100 Sheets: 5.5" x 8.5", 8.5" x 11"; 50 Sheets: 8.5" x 14", 11" x 17" |
| PH-7A 2 and 3 Hole Punch Unit, Supports 8.5" x 11" – 11" x 17"; 13 lb Bond – 110 lb Cover (45 – 300gsm) |
| 3F-730 Booklet Folder Supports 8.5" x 11", 8.5" x 14", 11" x 17"; 16 lb Bond – 24 lb Bond (60 – 90gsm) |
| 16 sheets; 25 lb Bond – 28 lb Bond (91 – 105gsm) 13 sheets; Fold booklet – no staple: 16 lb Bond – 24 lb Bond |
| 60 – 90gsm) 5 sheets; 25 lb Bond – 72 lb Index (91 – 120gsm) 3 sheets; 32 lb Bond – 110 lb Cover (121 – 256gsm) |
| l sheet; Trifold: 16 lb Bond – 24 lb Bond (60 – 90gsm) 5 sheets; 25 lb Bond – 72 lb Index (91 – 120gsm) 3 sheet: |
| Data Security Kit Provides Security Overwrite and Encryption for Print, Copy, and Scan, Optional System Memory, Optional Fax Memory, Original Hardcopy Holder (Document Tray), Card Authentication Kit, Banner Guide (A |
| BI GO |



IC# 855D400313







